



## CLIPBLOCK™ SMALL MODEL

Quick fitting with a no. 3 flat screwdriver. Highly compact and can be padlocked. Prohibition sign. Delivered in blister pack.

Reference	Description and 	
AL-201/1	5 units, no padlock	158
AL-201-C/1	Delivered with 1 padlock *	60
AL-216	Padlock only, steel shackle Ø 3 mm	16

\* Key on demand.





### THE

- 1 Compatible with all the brands of modular circuit breaker lockers, switches and differentials.



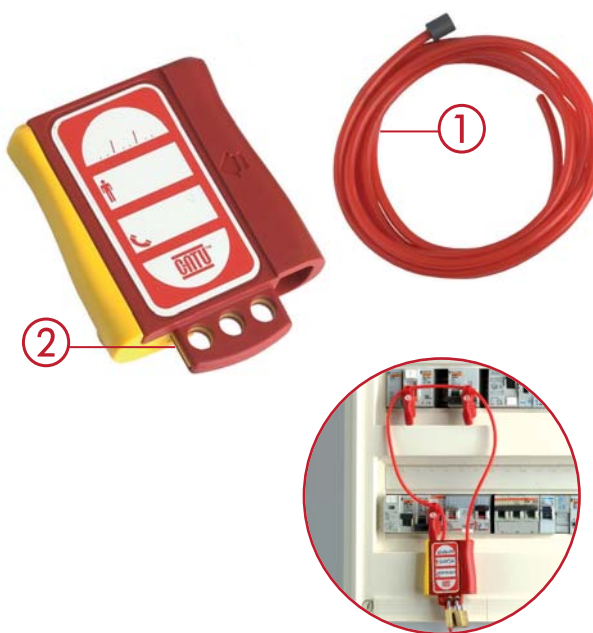
## MULTIPLE MODEL

Suitable for all types of low voltage protection unit locker. Particularly suited to the CLIPBLOCK™ circuit breaker locker. High resistance plastic cord. Length 2 m or 5 m. ABS body for use with Ø 4 to 6 mm padlocks.

Reference	Description and 			
AL-205	Supplied with 2 m PVC cord	3	6	110
AL-205/5	Supplied with 5 m PVC cord	3	6	160



### THE

- 1 Cable with plastic stopper to use in loop or single cord.
- 2 Allows to deport the padlock in case of lack of space.



## MEDIUM-SIZE MODELS

Red plastic. No tool needed for installation (tightened manually).

Reference	Holes Ø mm	Screw	 mm	
AL-208-C *	8	Stainless steel	52 x 25	20
AL-208-D **	8	Stainless steel	52 x 33	20

\* Bent snipe nose. \*\* Straight.

### THE

- 1 No tools needed for installation (tightened manually).
- 2 Trip worm to allow space for the padlock shackle.

