

## Extraction Arm Standard

For working environments with fumes, vapours or non explosive dust



Nederman Extraction Arm Standard is specially designed for working environments with fumes, vapours or non explosive dust, where the demands for higher airflows and temperatures are moderate. Typical workplaces can be welding schools, different types of applications in light production. The applications can be welding, grinding, or other industrial processes where an easily positioned arm is required. The arm is available in three lengths, 2, 3 and 4 m (7, 10 and 13 ft.) and equipped with a high efficiency extraction hood.

- The arm is flexible in all directions and simple to position
- Designed for wall mounting and suspended by an integrated wall bracket

#### 90 degree bend

- Allows rotation of 180 degrees
- Can be equipped with a damper placed in the bend as an accessory
- The hood can be tilted in all directions

<b>Product name</b>	Extraction Arm Standard
<b>Noise level (dB(A))</b>	67
<b>Installation</b>	[Indoor]
<b>Fume temperature</b>	Max 70 C (158 F)
<b>Extraction arm diameter (mm)</b>	160
<b>Airflow (m³/h)</b>	600 - 900
<b>Colour</b>	Blue
<b>Diameter, hose (mm)</b>	160
<b>Note</b>	Additional wall bracket needed. (Swivels 360 deg.)



## Extraction Arm Standard



Description	Arm length (m)	Weight (kg)	Model
Extraction arm standard	2	11	10500238
Extraction arm standard	3	13	10500338
Extraction arm standard (vertical)	4	16,5	10500538*

*\*Additional wall bracket needed. (Swivels 360 deg.)*

## Extraction Arm Standard

Accessory		Part No
	Damper for Standard arm	10500438
	Fan bracket for standard arm	10374218

## Extraction Arm Standard

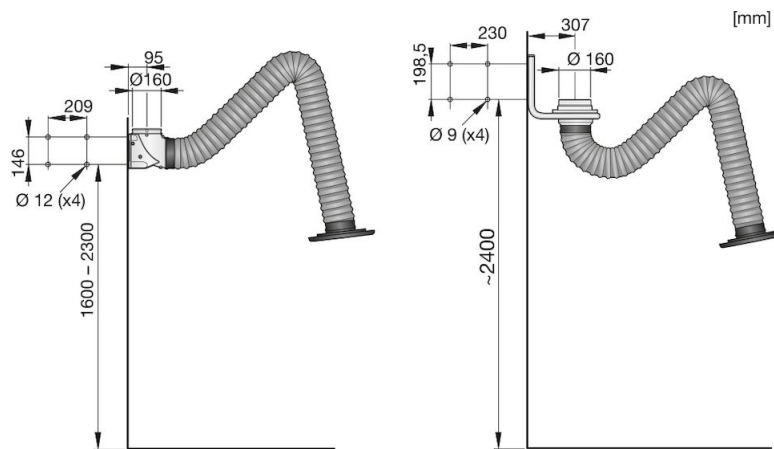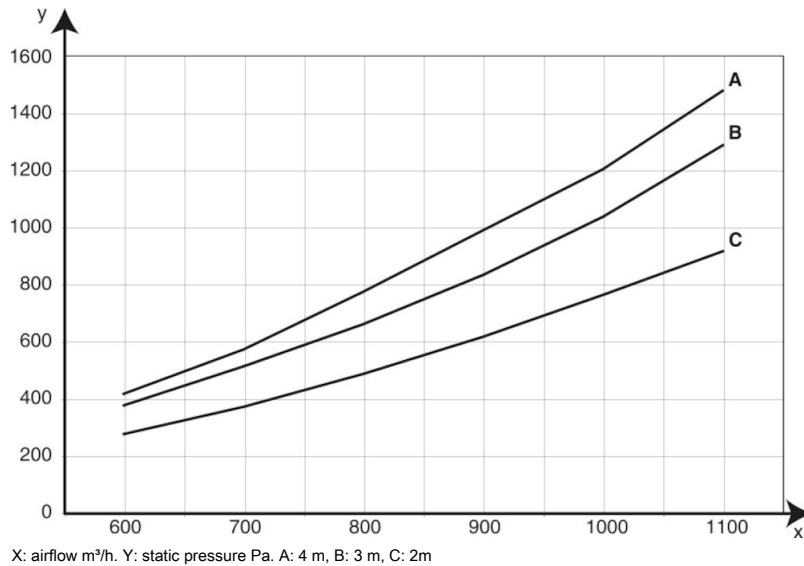

Left: Standard arm 2 & 3m.

Right: Standard arm 4 m.