



ELECTRICAL SAFETY GUIDE


Warning signs and
intervention equipment

Voltage detectors and
short-circuiting systems

Additional
equipment

IEC-61230/EN-61230 These equipment are intended for connection on: **permanent fixed points**

Reference	MT-1910	MT-1920
Icc (kA/1s)	20	30
Installation on fixed points	Ø 20 mm MT-2951 range	Ø 25 mm MT-3951 range
Composition	3 clamps MT-1911-E 1 MT-1911	3 clamps MT-1921-E 1 MT-1921
Connection set	3 cables 95 mm ² 1 earth cable 35 mm ²	3 cables 150 mm ² 1 earth cable 50 mm ²

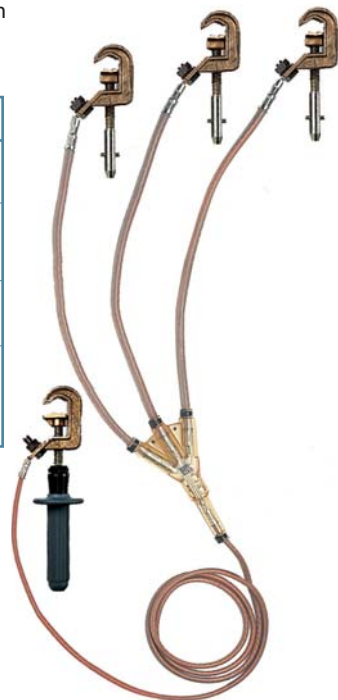

Stick to be ordered separately: CF-5-40-E



M.V. substations with separables connectors

Voltage tester

Check the absence of voltage on the capacitive terminals of plug-in M.V. bushings.

Sensor in the form of a bent finger enabling removal and reinstallation of the terminal insulating cover.

Signal via beeping and bright red flashing of electro-luminescent diodes.

Built-in function test via the "TEST" button which covers the entire device.

Permanent stand-by state.

Power supply: four 1.5 V, R-6 batteries.

Mounting on insulating stick via a universal end.

Specific insulating stick: CC-45-K : L = 1.25 m - 0.6 kg



CC-151-K

Ref. CC-151-K

delivered with pouch

Ref. CC-45-K

special 45 kV insulating stick
L: 1.25 m - Weight: 0.60 kg